

# UCHWYTY CYLINDRYCZNE / CYLINDRICAL CHUCKS

## Oprawki do gwintowania z kompensacją osiową



Quick-change tapping chucks cylindrical, with length compensation  
 Gewindeschneid-Schnellwechselfutter zylindrisch, mit Längenausgleich auf Zug und Druck  
 Резьбонарезные патроны с цилиндрическим хвостовиком



AXIAL COMPENSATION

TAPPING

Kod produktu Order No. Bestell-Nr. Код товара	$\phi d$ (mm)	$\phi d2$ (mm)	$\phi D$ (mm)	L (mm)	L2 (mm)	Zakres gwintowania Tapping range	C (mm)	T (mm)
FI20.GW19K.L41	20	19	38	50	41	M3 ÷ M12	7,5	7,5
FI20.GW31K.L63	20	31	55	75	63	M6 ÷ M20	12,5	12,5
FI25.GW19K.L41	25	19	38	56	41	M3 ÷ M12	7,5	7,5
FI25.GW31K.L63	25	31	55	56	63	M6 ÷ M20	12,5	12,5
FI32.GW19K.L41	32	19	38	61	41	M3 ÷ M12	7,5	7,5
FI32.GW31K.L63	32	31	55	61	63	M6 ÷ M20	12,5	12,5
FI32.GW48K.L109	32	48	79	61	109	M14 ÷ M33	20	20
FI40.GW19K.L41	40	19	38	72	41	M3 ÷ M12	7,5	7,5
FI40.GW31K.L63	40	31	55	72	63	M6 ÷ M20	12,5	12,5
FI40.GW48K.L98	40	48	79	72	98	M14 ÷ M33	20	20

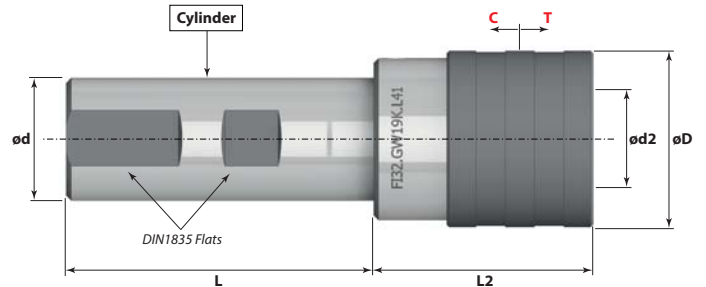

Produkty powiązane / Related Products



Nowość / New

## Oprawki ER do gwintowania do gwintowania z synchronizacją

Tapping chucks for synchronized tapping  
 Gewindebohrfutter zum synchronen Gewindebohren  
 Резьбонарезные патроны ER с синхронизацией





ER  
DIN6499

SYNCHRONIZED

TAPPING

Kod produktu Order No. Bestell-Nr. Код товара	$\phi d$ (mm)	$\phi D$ (mm)	$\phi D2$ (mm)	L (mm)	L2 (mm)	Zakres gwintowania Tapping range
FI25.ER20SY.L56	25	34	34	56	61	M3 ÷ M16
FI25.ER25SY.L56	25	42	35	56	65	M3 ÷ M20
FI25.ER32SY.L56	25	50	35	56	87	M3 ÷ M27
FI32.ER40SY.L61	32	63	62	61	108	M5 ÷ M33

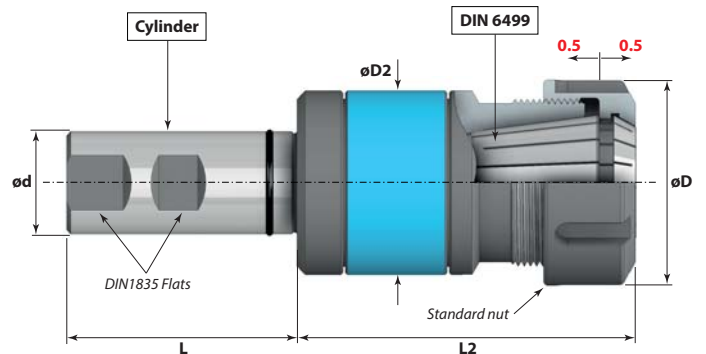

Produkty powiązane / Related Products

